



AAYU BUILD TECH PVT. LTD.

Call : +91 90990 44433

Factory Add. :

Opp. Monolith Surface LLP, Khokhara Road,
At, Nr. Hanuman Temple, Bela, Morbi - 363642,

Registered Add. :

Parshvanath Complex-3, Opp.Kuber Cinema,
8-A N.H., Morbi - 363642

Website : www.tumra.in | Email : info@aayubuildtech.in | CIN : U26999GJ2021PTC122161



**WE OFFER
A WIDE RANGE OF
CONSTRUCTION
CHEMICALS**

CATA_
LOGUE
PRODUCTS

COMPANY PROFILE

Tumra is a trusted provider of high-quality construction chemicals that meet the diverse needs of the construction industry.

With our expertise and innovative solutions, we offer a comprehensive range of construction chemicals designed to enhance durability, improve performance, and ensure the longevity of structures.

Our team of experts works closely with engineers, contractors, and architects to deliver tailored solutions that address specific project requirements.



TABLE OF CONTENT

	OUR VISION/MISSION	01
	GROUTS	02
	ADHESIVES	06
	WATER PROOFING	10
	ADMIXER	12
	ACCESSORIES	14




OUR VISION

Our vision is to become the foremost company providing innovative construction solutions to the building and construction industry.

OUR MISSION

We aspire to bring global construction technology to India and be your local partner for global construction products.

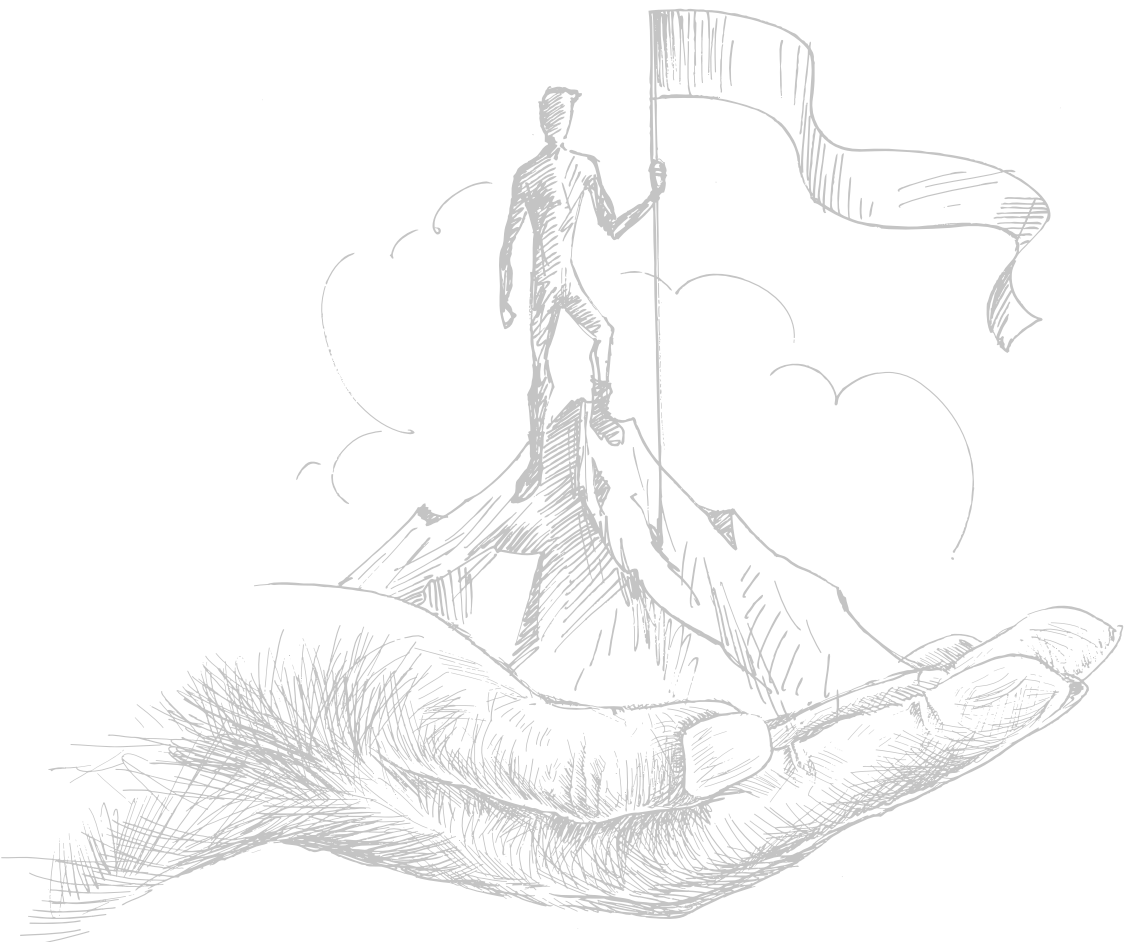

Our Values

Quality

We ensure high quality standards in all our products & services to maximise client satisfaction and minimise problems in the future.

Innovation


We know that to remain competitive in today's world, we must be innovative. Our products and services are driven by innovation to ensure we provide our clients the latest products in today's market.

Professional Approach

The construction sector is very unorganised and only with a process oriented, professional approach will ensure long lasting performance. We consider this approach as an integral part of our service.

Delivery

Construction segment is as much about delivery as it is about quality. At Jaisons, we focus on on-time delivery of material and projects to ensure complete client satisfaction.

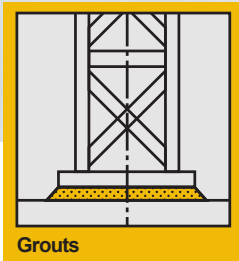

Grouts



GROUTS

ULTRA POXY

- 02. STAIN PROOF TWO PACK EPOXY GROUT
- 03. STAIN PROOF THREE PACK EPOXY GROUT
- 04. TILE GROUT
- 05. GROUT HARDNER



01 ULTRA POXY



Areas of Application

All Joint Free

Features/Benefits

- 100 % Stainfree
- Strong & Durable
- Chemical & Temperature Resistant
- Anti bacterial & Anti fungal
- 100 % Stainfree & Waterproof
- Interior & Exterior Applicable

PACK SIZE


400 gm

COVERAGE

Consumption Depend On
Joint Width, Size Of Tiles And
Workmanship

Technical Specifications

PROPERTIES	RESULTS
Application temperature	5°C to 30°C
Full cure	24 hours
Pot life	60 minutes
Initial setting time	15 minutes
Final Set @ R T	8 hours
Shrinkage	4.5 %
Density (g/cm ³)	1.2 g/cm ³

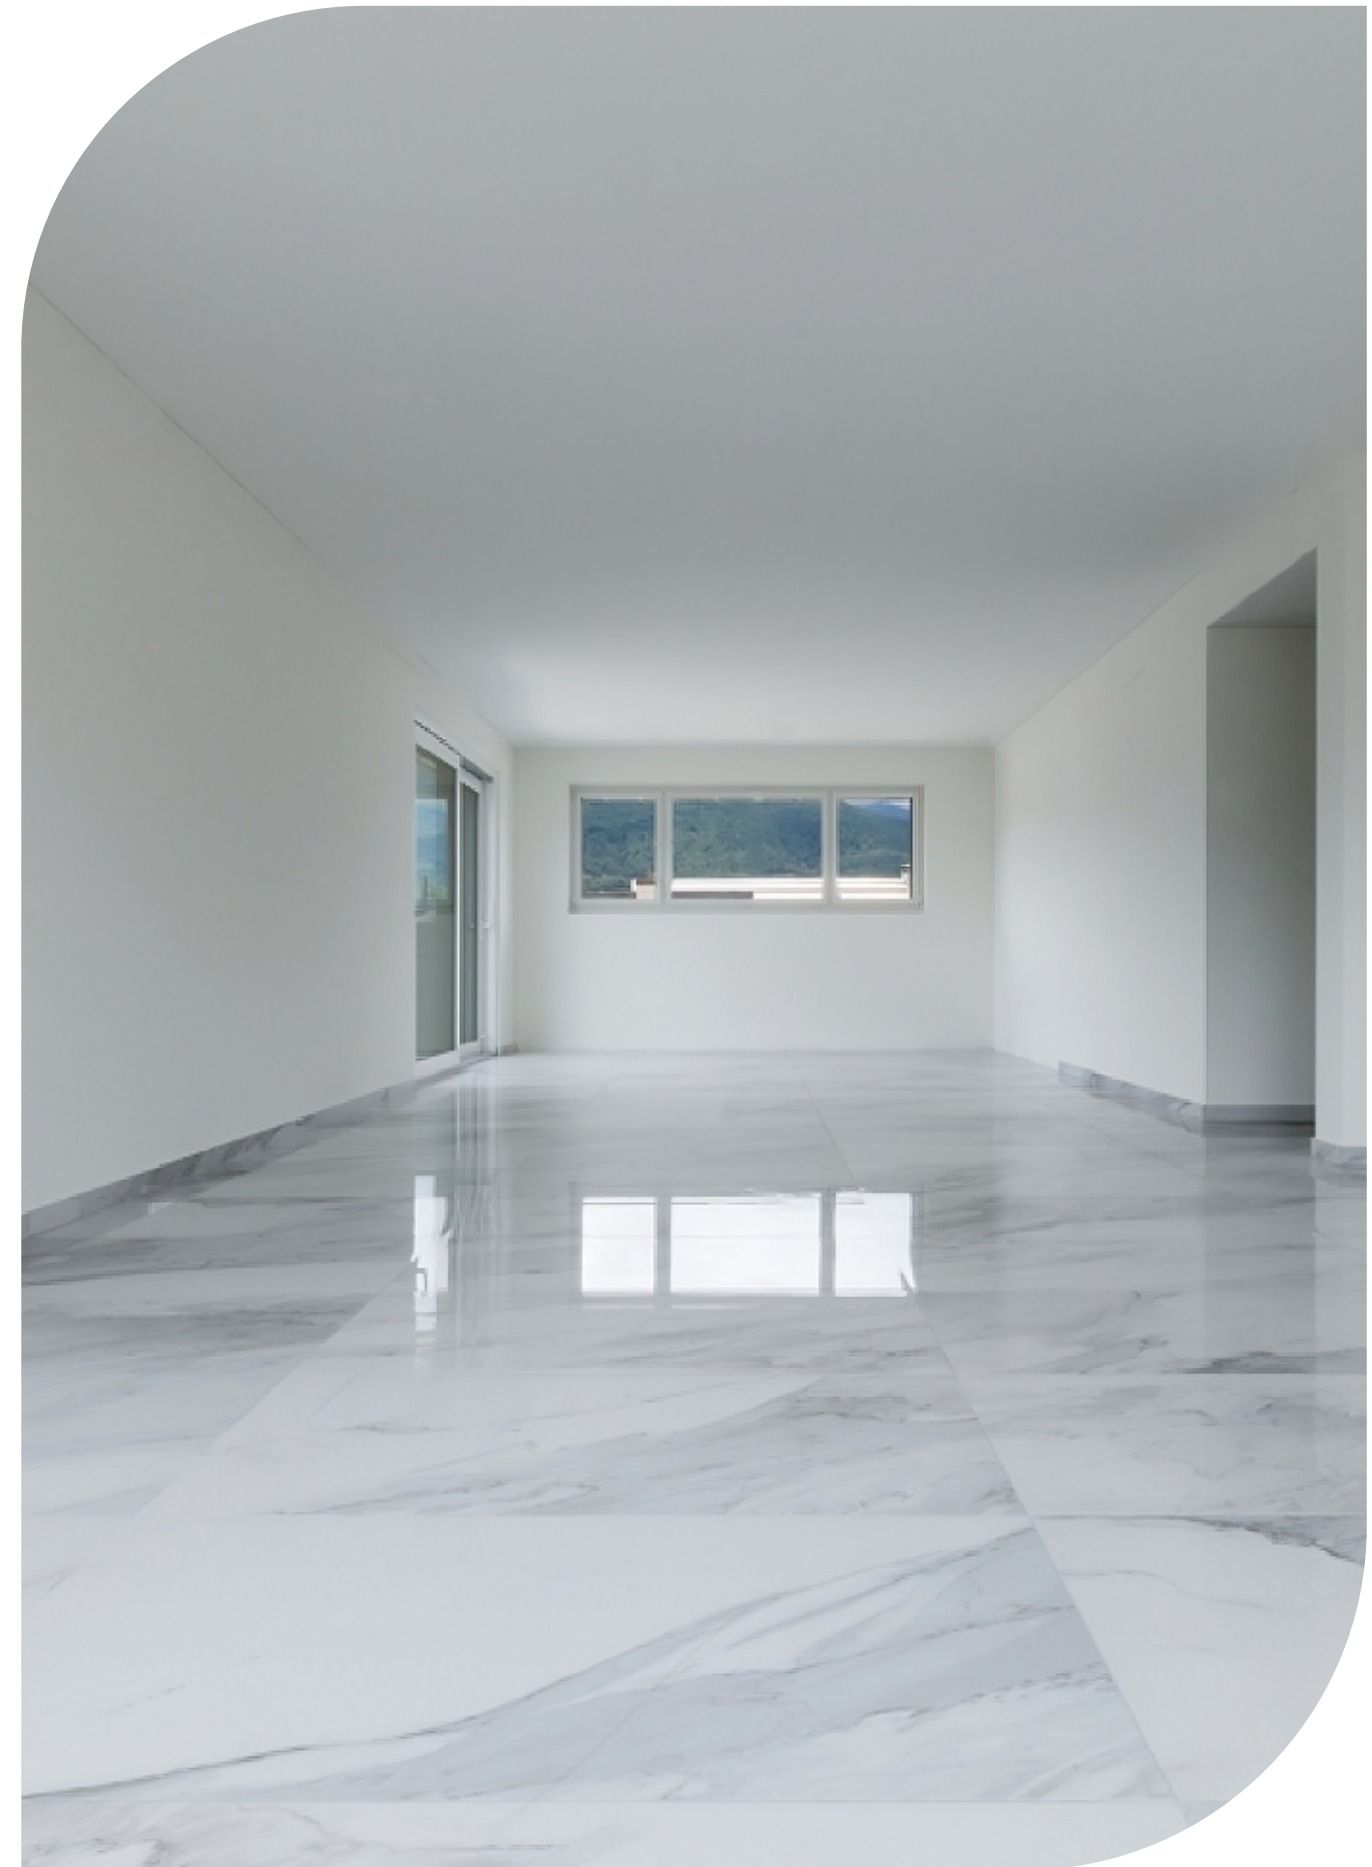



02 STAIN PROOF TWO PACK EPOXY GROUT



Areas of Application

Walls | Floors | Interior | Exteriors | Terrace | Dry Areas Work | Swimming Pools | Watertank Tiles | Bathroom | wash Areas

Features/Benefits

- High Performance
- High Strength & Silicon Modified
- Has Excellent Water-repellent Property
- Non-shrink
- Better Efflorescence Resistance
- Available in a Range of Colors
- Warranty for a 3 Year*

PACK SIZE

1 kg, 5 kg

Technical Specifications

PROPERTIES	RESULTS
Pot life @ 30°C	30 minutes
Open time	30 minutes
Adjustability	15 - 20 minutes
Initial setting time @ R T	2 hours
Final Set @ R T	8 hours
Shrinkage	<0.1 %
Water absorption	2.0 %



STAIN PROOF THREE PACK EPOXY GROUT 03

Areas of Application

Walls | Floors | Interiors & Exteriors | Dry Areas Work Tops

Features/Benefits

- Highly durable & strength.
- Dirt , Fungus and bacteria free Tile Joints.
- Strong bond with tile.
- Acid, chemical resistance, Waterproof.
- Easy to clean & install.
- Uniform in shade.
- Hygienic, Stain free, Non- Cracking

PACK SIZE

01 kg
05 kg

COVERAGE

Consumption Depend On Joint Width, Size Of Tiles And Workmanship.

Technical Specifications

PROPERTIES	RESULTS
Pot life @ 30°C	45 min.
Working time	45 minutes
Setting time	24 hours
Initial setting time @ R T	30 minutes to 3 hours
Final Set @ R T	< 7 Days
Shrinkage	<0.10%
Water absorption	0.3%





04 TILE GROUT

Areas of Application

Walls | Floors | Interiors & Exteriors | Dry Areas Work Tops

Features/Benefits

- Polymer modified grout
- Good Compressive strength
- Easy to use
- Durable
- Abrasion Resistance
- Available in range of colors


PACK SIZE

01 kg

Technical Specifications

PROPERTIES	RESULTS
Pot life @ 30°C	60 minutes
Open time, minutes 30	30 minutes
Adjustability, minutes	15 - 20 minutes
Initial Set @ R T	2 hours
Final Set @ R T	8 hours
Shrinkage	<0 %
Water absorption	8.1 %

GROUT COLOURS

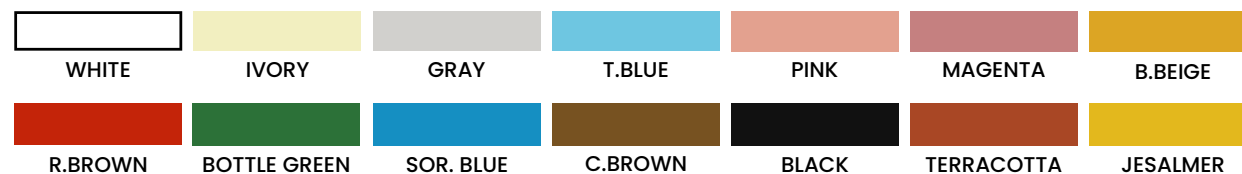

CEMENTITIOUS Grouts

TUMRA Grout is designed for use with TUMRA Grout for joint width 1mm to 3mm for porous & absorbent type tiles, non-vitreous clay tiles, marble & glazed wall tiles.

TUMRA is a superior quality cementitious grout with hydrophobic properties that allow tile grouts to resist water. Used for filling joints 1mm to 3mm in Both interior and exterior.

COVERAGE: Approximate sq.ft. coverage per 10kg bag of TUMAPOXY Unsanded Grout and TUMRA

Tile Size X thickness	Joint Width		
	1 mm	2 mm	3 mm
in mm			
100x100x3	1430	720	480
150x150x4	1610	810	540
200x150x4	1470	740	490
150x300x6	1430	860	478
300x300x6	2150	716	710
450x300x7	2205	1104	737
600x450x8	2755	1379	920
600x600x8	3210	1610	1070
600x900x11	2804	1403	1070
900x900x12	3213	1608	1070

05 GROUT HARDNER



PACK SIZE

200 ml
01 ltr

Areas of Application

Use With All Type Of Cementous Grout

Features/Benefits

- Polymer Additive for Cement
- Polymer Grouts, Super Grouts
- Wide Joint Grouts
- Improves the Water Repellence for Cement Polymer Grout Super Grouts & Wide Joint Grout.
- Improve the Strength
- Increase the Abrasion Resistance of Grouts

COVERAGE

Consumption Depend On Joint Width, Size Of Tiles And Workmanship.

Technical Specifications

PROPERTIES	RESULTS
Physical Appearance	Clear Liquid
Specific Gravity	0.955
Solid Content	20.5%
Odour	Medium



Adhesives



ADHESIVES

- 01. TILE ADHESIVE Copper (55)
- 02. TILE ADHESIVE Silver (80)
- 03. TILE ADHESIVE Gold (99.99)
- 04. TILE ADHESIVE Diamond (105.6)
- 05. BLOCK JOINTING MORTAR



01 TILE ADHESIVE Copper (55)



Areas of Application

Floor Upto 2' X 4' | Interior

Features/Benefits

- Fixing Ceramic Tiles for Floor & Parking Tiles
- Polymer Modified Adhesive
- Good Strength
- Easy Mixing & Application
- Interior Suitable

PACK SIZE

20 kg

COVERAGE

Approximately 4.5 to 5 m² /
20kg @ 3 mm Thickness
When Using a Thin Trowel

Technical Specifications

PROPERTIES	RESULTS
Appearance	Free flowing powder
Colour	Grey
Open time	35 to 45 minutes
Trafficable time	5 hours
Shear Adhesion	24 KN Tensile
Shrinkage	8 - 10 %
Adhesion strength 14 days, N/mm ²	>1550 N force

TILE ADHESIVE Silver (80) 02

Areas of Application

Floors | Walls Upto 12" X 18" | Interior

Features/Benefits

- Fixing Ceramic Tiles for Floor & Parking Tiles
- Polymer Modified Adhesive
- Good Strength
- Easy Mixing & Application
- Interior Suitable

PACK SIZE

20 kg

COVERAGE

Approximately 4.5 to 5 m² /
20kg @ 3 mm Thickness
When Using a Thin Trowel


Technical Specifications

PROPERTIES	RESULTS
Appearance	Free flowing powder
Colour	Gray
Open time	35 to 45 minutes
Trafficable time	5 hours
Shear Adhesion	24 KN Tensile
Shrinkage	8 - 10 %
Adhesion strength 14 days, N/mm ²	>1600 N force





03 TILE ADHESIVE Gold (99.99)

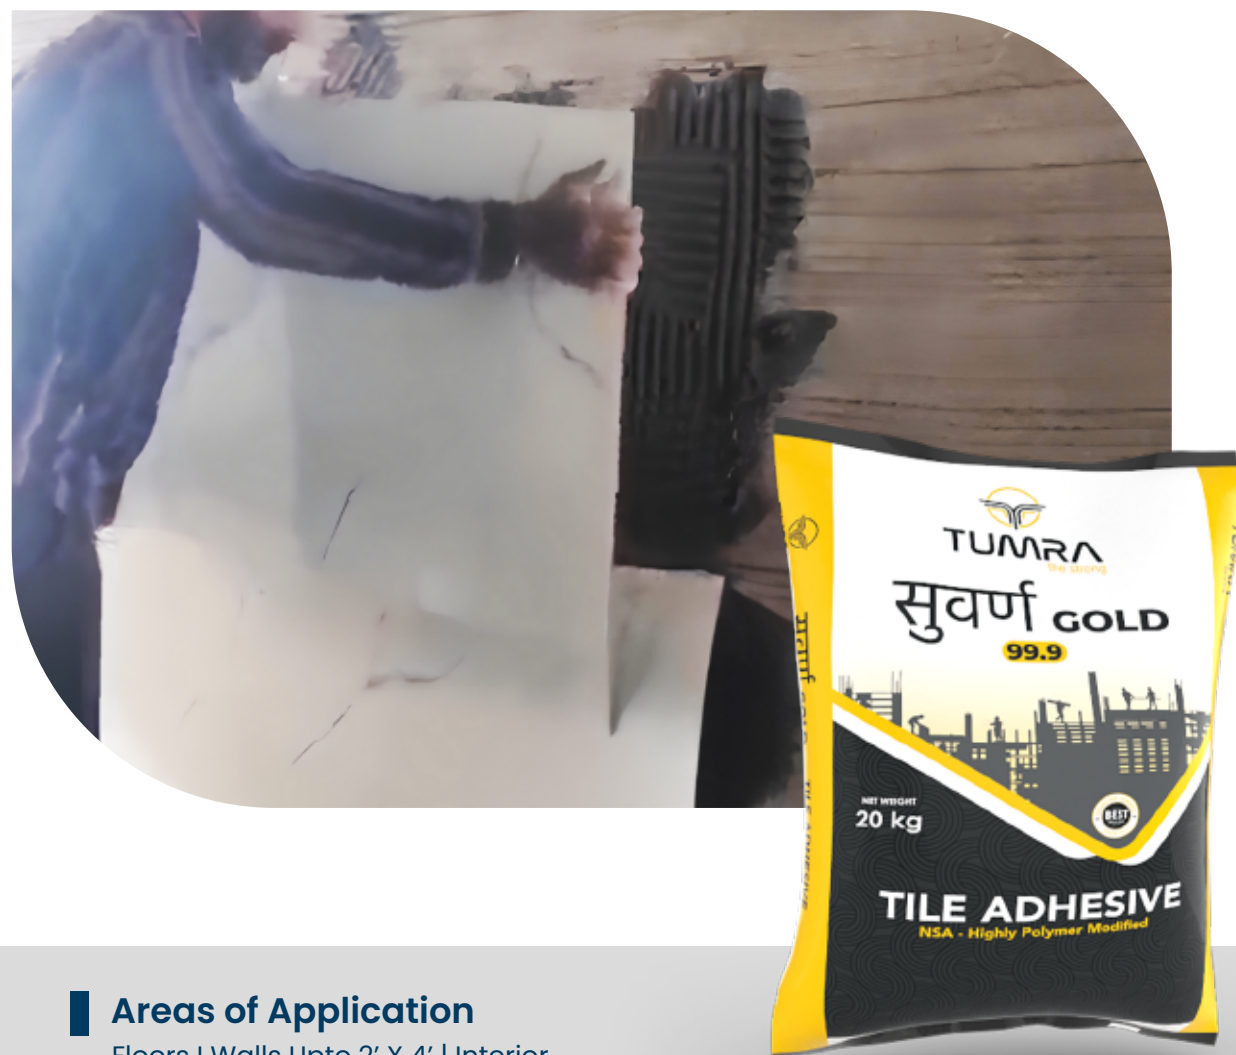

Areas of Application

Floors | Walls Upto 2' X 4' | Interior

Features/Benefits

- High Polymer Modified Adhesive.
- Easy Mixing & Smooth Application & Better Workability.
- High Strength.
- For Use on Walls & Floors in Interior.
- Specification for Adhesives for Use With Ceramic Tiles & Stones.

PACK SIZE

20 kg

COVERAGE

Approximately 4.5 to 5 m² / 20kg @ 3 mm Thickness When Using a Thin Trowel

Technical Specifications

PROPERTIES	RESULTS
Appearance	Free flowing powder
Colour	White
Open time	>20 Minutes
Trafficable time	5 Minutes
Shear Adhesion	24 KN Tensile
Shrinkage	8 - 10 %
Adhesion strength 14 days, N/mm ²	>1550 N force

TILE ADHESIVE Platinum (90) 04

Areas of Application

Floors Upto 4' X 8' | Walls Upto 2.5' X 5' & 4' X 6' Interior | Italian Marble | Granite Exteriors | Dry & Wet Areas | Parking Areas | Showers | Tile on Tile

Features/Benefits

- High Polymer Modified Adhesive.
- Easy Mixing & Smooth Application & Better Workability.
- High Strength.
- For Use on Walls & Floors in Interior & Exteriors.
- Specification for Adhesives for Use With Ceramic Tiles & Stones.

PACK SIZE


20 kg

COVERAGE

Approximately 4.5 to 5 m² / 20kg @ 3 mm Thickness When Using a Thin Trowel

Technical Specifications

PROPERTIES	RESULTS
Appearance	Free flowing powder
Colour	White
Open time	>20 Minutes
Trafficable time	5 Minutes
Shear Adhesion	24 KN Tensile
Shrinkage	8 - 10 %
Adhesion strength 14 days, N/mm ²	>1950 N force

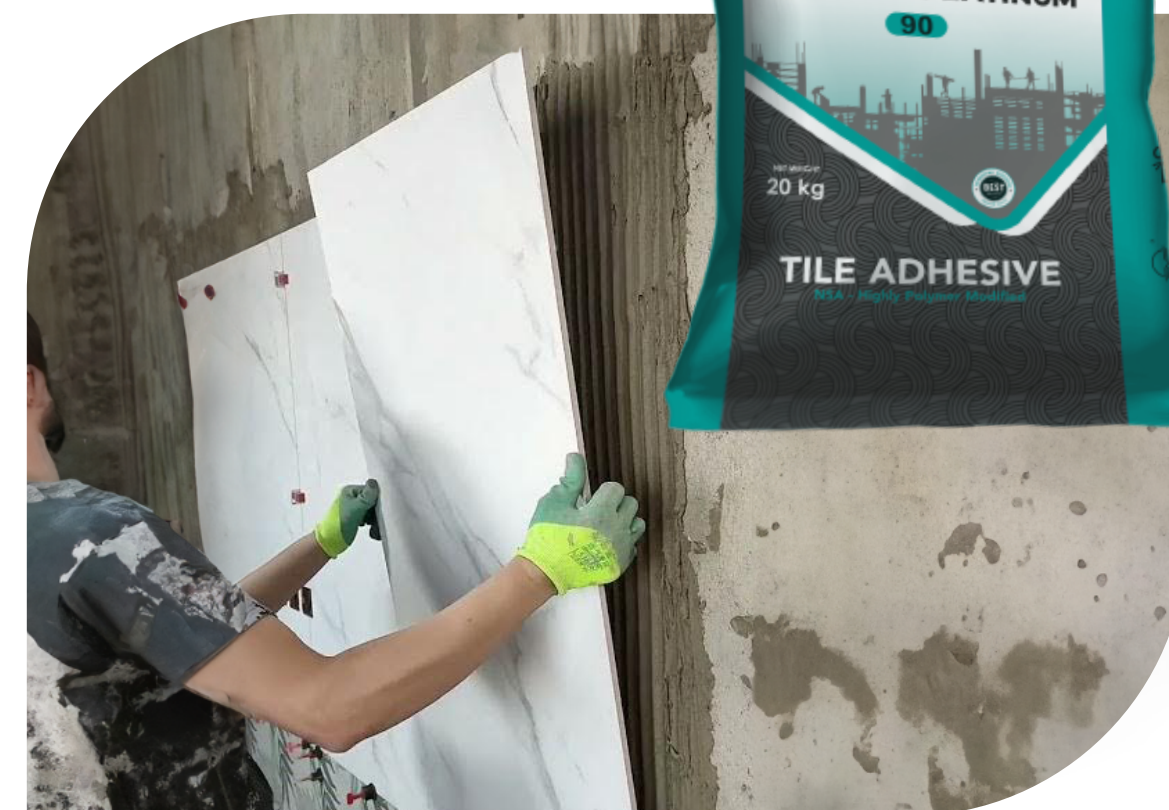

05 TILE ADHESIVE

Diamond (105.6)



Areas of Application

Floors | Walls Upto 4' X 8' | Interiors | Italian Marble | Granite Exteriors | Dry & Wet Areas | Parking Areas | Showers | Swimming Pool | Tile on Tile

Features/Benefits

- High Polymer Modified Adhesive.
- Easy Mixing & Smooth Application & Better Workability.
- High Strength.
- For Use on Walls & Floors in Interior & Exteriors.
- Specification for Adhesives for Use With Ceramic Tiles & Stones.

PACK SIZE

20 kg

COVERAGE

Approximately 4.5 to 5 m² / 20kg @ 3 mm Thickness When Using a Thin Trowel

Technical Specifications

PROPERTIES	RESULTS
Appearance	Free flowing powder
Colour	White
Open time	>20 Minutes
Trafficable time	5 Minutes
Shear Adhesion	24 KN Tensile
Shrinkage	8 - 10 %
Adhesion strength 14 days, N/mm ²	>1950 N force

BLOCK JOINTING MORTAR 06

Areas of Application

Interiors | Exteriors

Features/Benefits

- Long Working Time.
- No Curing Required After Block Work is Done Coverage.
- Improved Adhesion Between Two Blocks Fast & Economical.

PACK SIZE

40 kg

COVERAGE

Approximately 100-130 sq ft. per 40kg bag.





WATERPROOFING



WATER PROOFING

01. URI WATER PROOFING

01 URI WATER PROOFING



Features/Benefits

Highly Potent and Versatile SBR Based Liquid for High Performance Applications in Waterproofing and Repairs.

Economical Less Material Wastage Material Does Not Fall Back/ Rebound, When Used as Bonding Agent High Bond Strength Prevents Leakage & Dampness Enhances Strength of a Repair Mortar & Provides Durability

Technical Specifications

PROPERTIES	RESULTS
Appearance	Liquid
Absorption	0.4%
Initial setting time	180 min
Service setting time	< 7 days
Bond strength to quarry tile	>1200 Psi (8.2 Mpa)
Compressive strength	>7500 Psi (51.7 Mpa)
Tensile strength	>1500 Psi (10.3 Mpa)
Thermal shock	>1100 Psi (7.5 Mpa)
Linear Shrinkage	< 0.10 %
Sag	No change
Solid Content	51%

Areas of Application

Terrace | Garden Terrace | Bathroom | Showers | Water Tank | Swimming Pool | Basin Areas

PACK SIZE

200 ml
500 ml
1 ltr
5 ltr
20 ltr

COVERAGE

70–80 sq.ft per kg/ in
2 coats





Admixer



ADMIXER

01. MALAMINE BASE CEMENT PLASTICIZER

02. TILES CLEANER



01 MALAMINE BASE CEMENT PLASTICIZER



Technical Specifications

PROPERTIES	RESULTS
Appearance	Free flowing thin liquid
Setting time minutes	Initial-140; final-260
Sp gravity @ 25°C	1.05 ± 0.02 , gmlcc
Non volatile Content	13 ± 0.5%
P H Value	11-13
Colour	Wine Red Colour
Water Permeability	<50 % of control
Compressive strength N/sq mm	Equal to control

Areas of Application

Terrace | Garden Terrace | Bathroom | Showers | Water Tank | Swimming Pool | Basin Areas

PACK SIZE

200 ml
500 ml
1 ltr
5 ltr
20 ltr
200 ltr

DOSAGE

200 ml Per 50 kgs Bag of cement.



TILES CLEANER 02

INSTRUCTIONS FOR USE

A Powerful, Heavy Duty, Acid - Based Cleaner for Ceramic Tiled Floors and Walls. The Cleaner Can Be Easily Applied to Both Horizontal and Vertical surface, Where It Remains in Contact with The Area to Be Cleaned. Heavy Duty Tile Cleaner is Designed for Removal of Cement film Residues, Efflorescence and Lime Scale. It May Also Be Used as General-Purpose Cleaner on Other Acid Resistant surface.

Features/Benefits

- Powerful formula
- Fast acting
- Easy to apply
- Removes cement film
- Removes residues, efflorescence and most oxide stains

Areas of Application

Walls | Floors | Interiors | Exteriors |
Dry & Wet areas | Showers | Swimming Pools

PACK SIZE

500 ml
01 ltr

NOTE

Do not use on surfaces that are not resistant to acid such as marble / terrazzo. Do not use your bare hand, use hand gloves while using of tiles care. Highly reactive to skin.



ACCESSORIES

01. TILE SPACER

02. TROWEL

03. TILE LEVELING KIT



**TILE
SPACER**



TROWEL



**TILE
LEVELING
KIT**



CARE SUPPLY
INNOVATION

ASTM D-2564

RESEARCH
DISTRIBUTION

COMPLIANCE
TRUST
STANDARDS

PROFIT
ISO 9001 : 2023
PRODUCTS

MARKET
DEMAND
CUSTOMER
SATISFACTION

QUALITY

TUMRA

CORPORATE SOCIAL RESPONSIBILITY
RANGE WORLDWIDE

CONSTRUCTION ADHESIVES CHEMICALS

TILE & STONE ROOF, WALL & FLOOR SOLVENTS
WALL PUTTY GROUT WATERPROOFING

EPOXY
LUBRICANT
CLEANER

DAMP PROOF
CRETE

CRACK REPAIR
INSTANT FIX